#### **Technical Parameter**

Type		KSCAN-Magic	KSCAN-Magic II
Scan mode	Ultra-fast scanning	11 blue laser crosses	17 blue laser crosses
	Hyperfine scanning	7 blue parallel laser lines	
	Large area scanning	11 parallel infrared laser lines	
	Deep hole scanning	1 extra blue laser line	
Accuracy (1)		up to 0.020 mm (0.0008 in)	
Scanning rate up to		2,700,000 measurements/s	4,150,000 measurements/s
Scanning area up to		1440 mm × 860 mm (57.0 in × 33.9 in)	
Laser class		CLASS II (eye-safe)	
Resolution up to		0.010 mm (0.0004 in)	
Photogrammetry system	Scanning area	3760 mm × 3150 mm (148.0 in × 124.0 in)	
	Depth of field	2500 mm (98.4 in)	
Volume (2) accuracy	Work alone	0.015 mm + 0.030 mm/m (0.0006 in + 0.00036	
	Work with 1m reference bar	in/ft) 0.015 mm + 0.020 mm/m (0.0006 in +	
	Work with MSCAN-L15	0.00024 in/ft) 0.015 mm + 0.012 mm/m (0.0006 in	
Stand-off distance		+ 0.00014 in/ft) 300 mm (11.8 in)	
Depth of field		925 mm (36.4 in)	
Output formats		.stl, .obj, .ply, .asc, .igs, .txt, .mk2, .umk and etc.	
Operating temperature range		-10°C – 40°C (14°F-104°F)	
Interface mode		USB 3.0	
Patents		CN204329903U, CN104501740B, CN104165600B, CN204988183U, CN204854633U, CN204944431U, CN204902788U, CN105068384B, CN105049664B, CN204902784U, CN204963812U, CN204902785U, CN204902790U, CN106403845B, CN209197685U, CN209263911U, CN106500627B, CN106500628B, CN206132003U, CN206905709U, CN107202554B, CN209310754U, CN209485295U, CN209485271U, CN3054469205 CN209991946U, US10309770B2, KR102096806B1, KR102209255B1, US10914576	

(1) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, probing error (size) (PS) performance is evaluated. (2) ISO 17025 accredited: Based on VDI/VDE 2634 Part3 standard and JJF 1951 specification, sphere spacing error (SD) performance is evaluated.

# Electronica Mechatronic Systems (I) Pvt. Ltd.

Address: Unit-37 & 44, Electronic Co-operative Estate, Pune-Satara Road, Maharashtra, 411009, India

Tel: 020 - 24224440, 24229398

E-mail: enquiry@electronicaems.com





## **Five Modes at Your Fingertips**



## **Large-area Scanning**

KSCAN-Magic innovatively adopts large-area scanning powered by 11 infrared parallel laser lines. Its ultimate scanning area reaches 1440 mm × 860 mm, achieving wide-range measurement with ease.



It can 3D scan with 17 blue laser crosses and capture up to 4,150,000 measurements per second, greatly improving work efficiency.



## **Deep Hole Scanning**

This mode can accurately capture 3D data of deep holes and hard-to-reach areas.






# **Hyperfine Scanning**

With 7 parallel blue laser lines, KSCAN-Magic Upgrade Series 3D scanner can accurately obtain complete data of complex objects, easily capturing every detail with a maximum resolution of 0.010 mm.



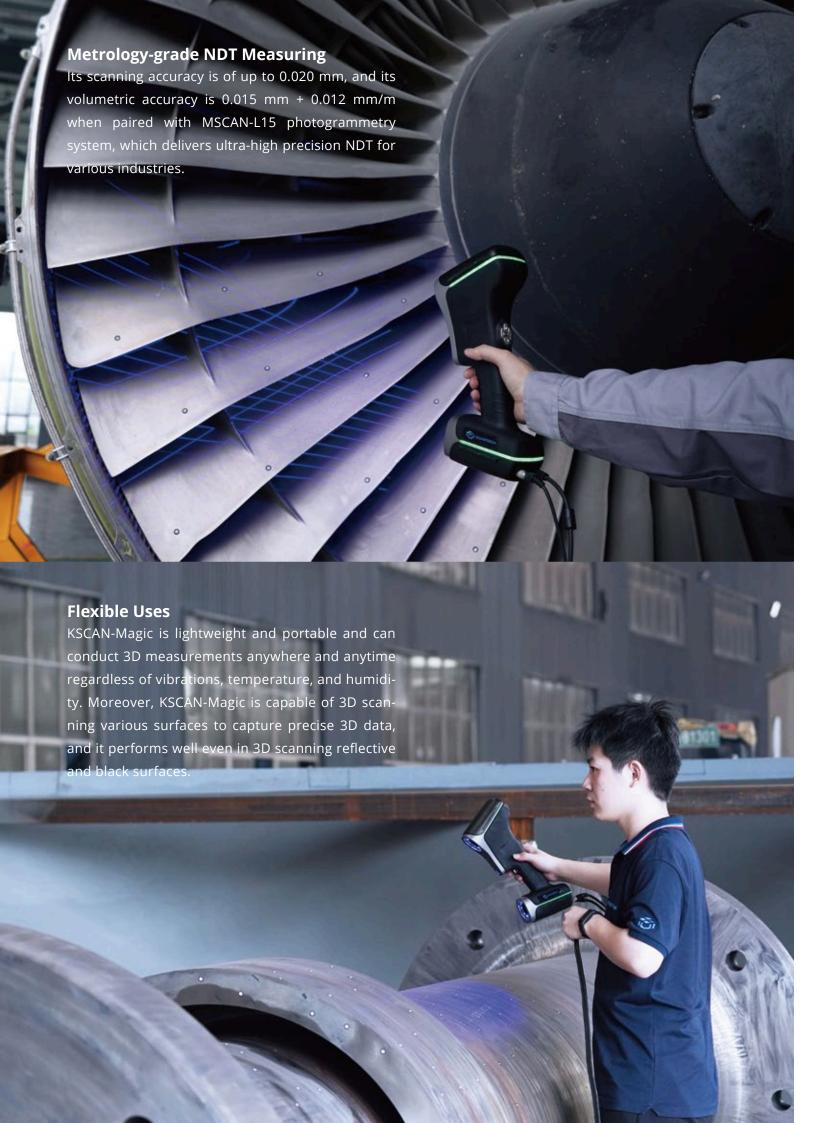


#### **Massive Functions**



**Intelligent edge inspection:** It boasts an optional module for intelligent edge inspection. With high-precision gray value measurement, users can inspect closed features precisely and obtain repeat- able measurement results.



**Contact probing:** It can be paired with a portable CMM K-Probe to probe inaccessible areas and complex parts, offering comprehensive and precise 3D solutions.



**Pipe measurement:** Thanks to KSCAN-Magic's various operating modes, it is capable of 3D scanning pipes of different sizes and materials. When combined with optional software, it can conduct reverse engineering and inspection for pipes.



**Automated 3D system:** It can be paired with Scantech's automated 3D inspection system, enabling effortless deployment and intelligent control to conduct automated batch inspections.