


Magna Linear

Magnetic Linear Encoder System

Magna Linear encoder series is a contact less high speed Measurement system, easy to install and highly resistant to oil, dust, dirt and vibrations, making them ideally suitable for use under harshest of conditions. These are IP-68 protection class which makes them suitable for such applications.


The system consists of a magnetic tape and a reader head. The magnetic tape consists of a magnetic rubber glued to a Stainless steel tape using a special process. The glueing is such that the Magnetic tape will near same thermal expansion coefficient of stainless steel.

A magnetic pattern consisting of alternate North and south poles are printed on the magnetic tape using our fully automatic magnetization machine. The reader head reads this pattern and gives the required output.

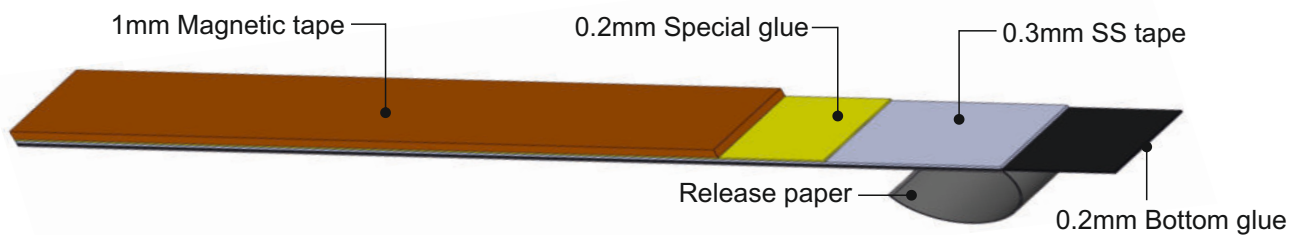


Salient Features:

- Available in Industry accepted IP-68 protection class
- Available in Absolute as well as Incremental outputs
- Available in 1mm, 2mm, 2.5mm and 5mm as standard pole pitches. Custom pole pitches available on request
- Wide variety of resolutions from 0.1 μ m to 100 μ m.
- Different accuracy grades of magnetic tapes available
- Supports measuring speed of 4 m/s (240 m/min) at 1 μ m resolution
- Supports measuring length up to 60 meters
- Supports RS422 and 1Vpp analog output in Incremental encoder and BiSS-C and SSI protocol output in Absolute encoder
- Manufactured to ISO 9001:2015 Standard

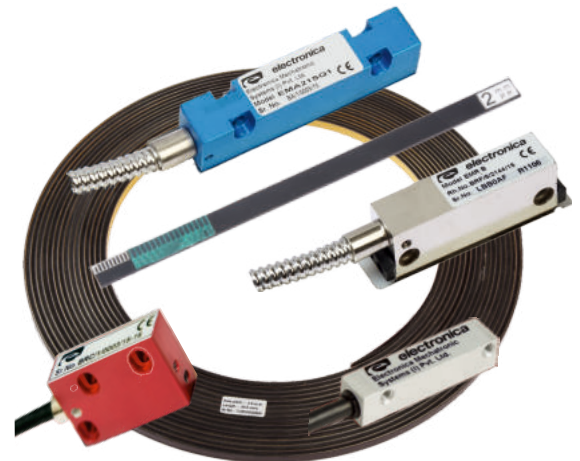

Major Applications:

- | | |
|----------------------------|-------------------------------|
| Machine Tools Industry | Measuring/Inspection Machines |
| Automation | Robotics |
| Material Handling Machines | Special Purpose Machines |
| Length Cutting Machines | Pick and Place Machines |
| Dispensing Machines | Elevator Technology |
| Medical Engineering | Linear Motor Applications |

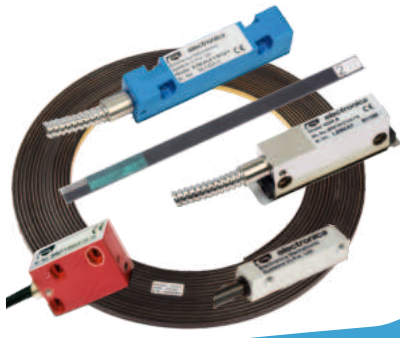


Magnetic Linear Encoder System

Specifications for Magnetic tapes:

Pole Pitch	1mm, 2mm, 2.5mm, 2.56mm, 5mm
Measuring types	Incremental and Absolute
Accuracy grade (per mtr)	$\pm 5\mu^*$, $\pm 10\mu$, $\pm 15\mu$, $\pm 20\mu$, $\pm 40\mu$, $\pm 100\mu$
Tape width	10mm + 0.2mm
Tape thickness	1.5mm + 0.1mm (w/o back adhesive and w/o protective tape)
Protective layer types	Option 1: Vinyl protection layer (Thickness 0.1mm) Option 2: Stainless steel tape (thickness 0.3mm)
Maximum length	60mtrs
Thermal expansion coefficient	$\sim 11 \times 10^{-6}$ per °C
Operating Temperature	-20 °C to +85 °C
Storage Temperature	-20 °C to +85 °C
Minimum bending radius	150mm
Standard packing length	20m rolls (Higher lengths up to 60mtrs available on request)
Reference mark options (For Incremental only)	Option 1: No reference mark (Full incremental grating) Option 2: Multiple reference mark 50mm spaced Option 3: Single mark as per requirement Option 4: Distance coded reference mark Option 5: Custom reference mark
Material	Extruded plastic with Barium Ferrite on Stainless steel tape
Weight	70 grams per meter including the top protective cover

* For accuracy grade of $\pm 3.5\mu$ and $\pm 5\mu$ requires special Magnetization process

Magnetic tape Grating variety

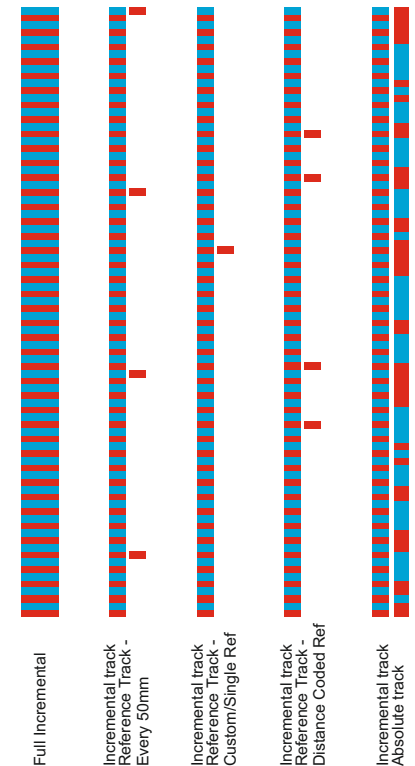


Specifications for Reader head:

	EMR	EMC25	EMC14	EMA21
Type of Encoder		Incremental		Absolute
Pole Pitch	1mm/2mm/2.5mm/5mm	1mm / 2mm / 5mm		2mm
Resolution (X4 edge)	0.1 to 100 μ m	0.244 to 100 μ m		1 μ m, 5 μ m
Reader Head Dimensions (L X W X H)	60mmX16mmX22mm	35mmX10mmX25mm	A:36mmX13mmX14mm B:36mmX11mmX14mm	81mmX16mmX18.5mm
Accuracy		$\pm 10\mu$ m		$\pm 15\mu$ m
Repeat Accuracy		± 1 resolution count		
Hysteresis		< 3 μ m		
Power Supply	+5VDC ($\pm 5\%$)	+5VDC, 6.5-30VDC		+5VDC, 6.5-30VDC
Current Consumption		< 0.6W		< 1.5W
Output signal		Option 1 - Quadrature Differential RS422 Option 2 - 1Vpp Signal with Signal period of one pole pitch		Option 1 - SSI** Option 2 - BiSS-C**
Reference sensing		Standard		-
Operating Temperature		-20°C to 85°C		
Storage Temperature		-20°C to 85°C		
Relative Humidity		20% to 80% Non-condensing		
Cable Type	Armoured or PUR Cable	PUR Cable		Armoured or PUR Cable
Standard Cable Length		3 meters (Max. 20 meters*)		
Output Connector		Standard - 9 pin D type Connector***		
Measurement Speed		4MHz (4m/s @ 1 μ m resolution)		
Protection Class		IP68		




* Additional cable length available on request **Optional 1Vpp or RS-422 Incremental signals also available with Absolute signals

*** For EMA21 Encoder other connector options also available





Magnetic Linear Encoder System

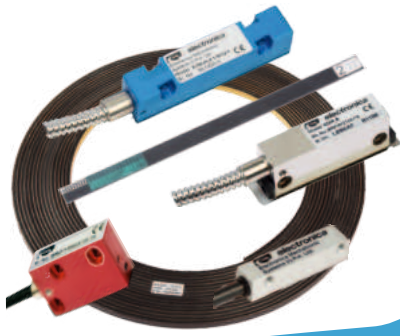

Magnetic tape mounting options:

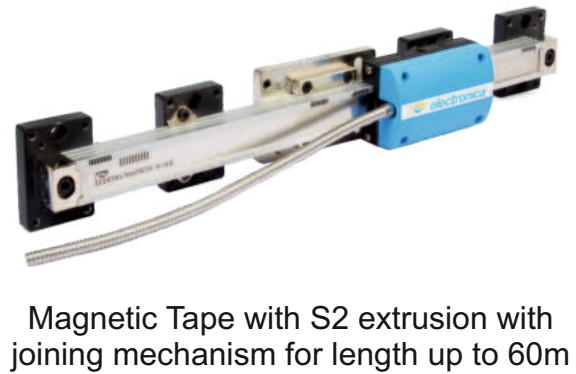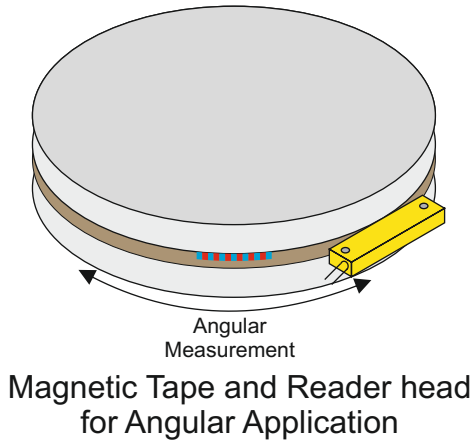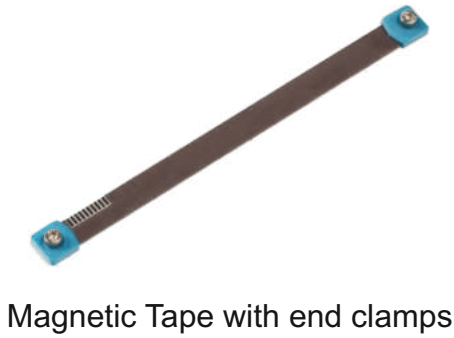

Reader head dimensional details:

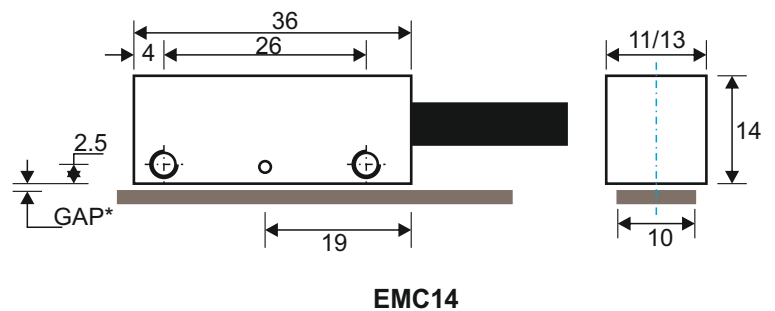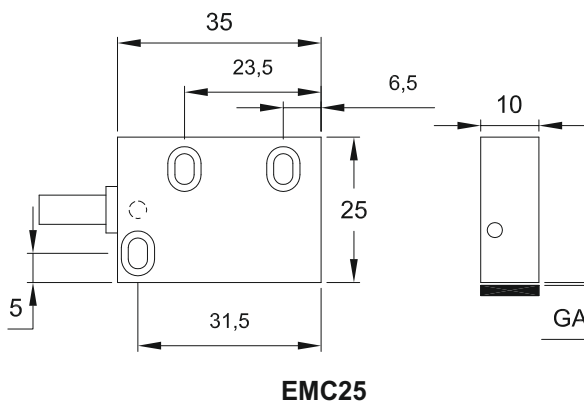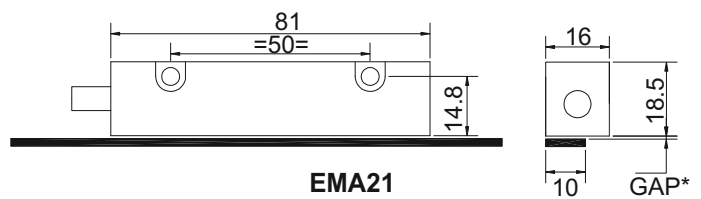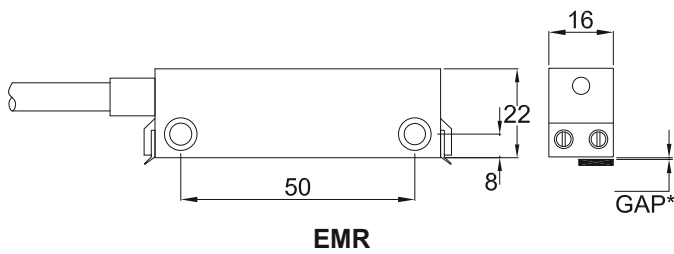

Pole Pitch	1mm	2mm	2.5mm	5mm
Gap *	0.1-0.3mm	0.1-0.8mm	0.1-1.0mm	0.1-2.5mm

Notes



Electronica Mechatronic Systems (I) Pvt. Ltd.

Unit No. 37 & 44, Electronic Co-op. Estate, Pune-Satara Road,
Pune 411009 India
Tel.: +91-20-2422 4440, 2422 2293

Email: enquiry@electronicaems.com

Web: www.electronicaems.com

Dealer Stamp